

Bronze

VMA Series

For Commercial and General Industrial Applications

2-Piece Screwed Body Ball Valve


600 PSI CWP • 150 PSI WSP

VMA Series ball valves offer maximum strength, durability, and maintenance-free

Full Port
1/4"-1/2"

Standard Port
3/4"-2"

operation all in one package! Industrial two-piece bronze valves are precision machined and designed to out last lightweight imports. Operating temperature range: -20° to 425° F.

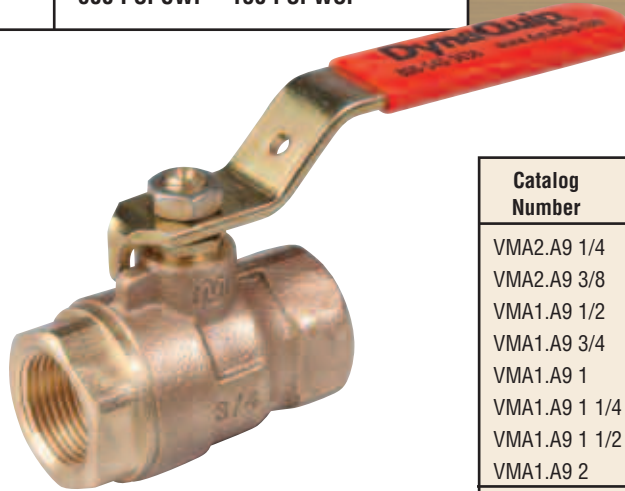

Catalog Number	Trim	Porting
VMA2.A9 1/4	BRASS	FULL
VMA2.A9 3/8	BRASS	FULL
VMA1.A9 1/2	BRASS	FULL
VMA1.A9 3/4	BRASS	STANDARD
VMA1.A9 1	BRASS	STANDARD
VMA1.A9 1 1/4	BRASS	STANDARD
VMA1.A9 1 1/2	BRASS	STANDARD
VMA1.A9 2	BRASS	STANDARD
VMA2.A90A 1/4	316 SS	FULL
VMA2.A90A 3/8	316 SS	FULL
VMA1.A90A 1/2	316 SS	FULL
VMA1.A90A 3/4	316 SS	STANDARD
VMA1.A90A 1	316 SS	STANDARD
VMA1.A90A 1 1/4	316 SS	STANDARD
VMA1.A90A 1 1/2	316 SS	STANDARD
VMA1.A90A 2	316 SS	STANDARD

Options:

Latching Lockout Handle Kit (OP)
Stainless Steel Trim Available (OA)

- Corrosion-Resistant Bronze Body
- Blowout-Proof Stem Design with Adjustable Packing
- Reinforced PTFE Seats and Seals
- Corrosion-Resistant Handle
- 4:1 Pressure Safety Factor

VVA Series

For General Media Service

3-Piece Bolted In-Line Maintenance Valves with Stainless Steel Trim

1/4" - 2" 600 PSI CWP


VVA2 Series ball valves are designed for general industrial applications where

Full Port
1/4"-2"

maintenance is key. Three-piece bronze body valve has NPT end connections, 316 SS trim, ISO

5211 direct mount pad, and latch-lock handles. Valves feature PTFE seats, blowout-proof stems, and a unique adjustable stem packing, which allows adjustment without handle or actuator removal. Operating temperature range: -20° to 400° F.

- Corrosion-Resistant Bronze Body
- Simple, Fast Installation and Maintenance
- Stainless Steel Trim
- Latch-Lock Handles Standard
- Unique Stem Seal Adjustment
- ISO 5211 Direct Mount Pad

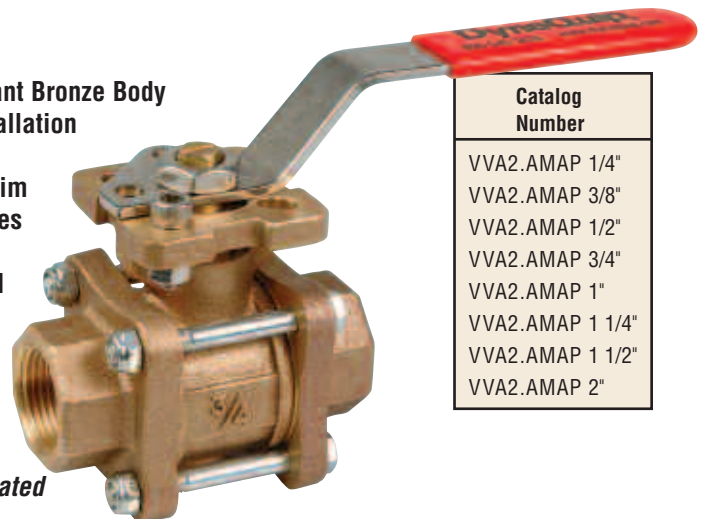

Catalog Number
VVA2.AMAP 1/4"
VVA2.AMAP 3/8"
VVA2.AMAP 1/2"
VVA2.AMAP 3/4"
VVA2.AMAP 1"
VVA2.AMAP 1 1/4"
VVA2.AMAP 1 1/2"
VVA2.AMAP 2"

This valve is automated on pages 6 and 7.

Options:

Repair kits available. Contact Customer Service at 800-545-3636.